

## TRUCKLOADER

The **dsh TRUCKLOADER** designed with ergonomics and productivity in mind to save your operation time and money.

A safe and convenient conveyor used for loading and unloading trailers. The

**dsh TRUCKLOADER** has quickly become one of our most popular products.



Available in both Belt and Roller conveyor styles, a wide range of products can be loaded or unloaded. Standard widths up to 48" available and lengths of up to 75' for use in full size tractor trailers.



Operator driven by one simple joystick controller, the **dsh TRUCKLOADER** drives in and out of trailers with great ease saving operators the tasks of lifting and carrying product.


# TRUCKLOADER

## Benefits

With minimal operator training required, your increase in case loading and unloading rates begin immediately. Forklift travel at dock doors becomes minimized, and your dock operation becomes safer for all your personnel. A pivoting section of roller conveyor at the operator end with photoeye ensures no products overflow onto the operator unloading. When in operation, a red beacon light on the control panel flashes to warn all employees of moving machinery.

## Construction

- 10ga formed sliderbed
- 10" structural HD frame
- 14" solid durable rubber wheels
- pvc 120 cos belting
- Nema 1 control enclosure
- SEW Eurodrive gear motor

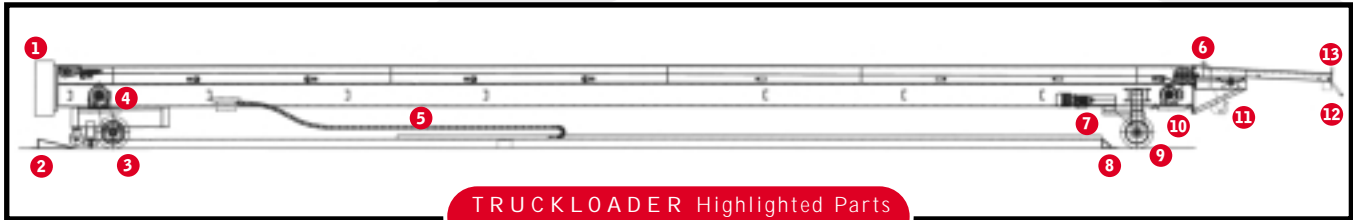

TRUCKLOADER Highlighted Parts Reference Chart Below

## Safety

As with all of our equipment designs, operator safety is our primary concern. The **dsh TRUCKLOADER** comes equipped with a "safety bar" at the operator station to prevent danger during operations. Emergency stop buttons at both ends of the **dsh TRUCKLOADER** ensure a prompt shut down when necessary and all pinch points and moving components are guarded for operator safety.

### BELT SPECIFICATIONS

Carrying Surface	Black PVC 150 COS with metal lacing
Belt Width	13", 17", 21", 27", 33"
Conveyor speeds	70 fpm standard: variable speed optional
Length	20' to 70'
Operator controls	8-way joystick or 4-way joy stick with for./rev. buttons
Paint	Standard Gray: Custom colours upon request

### ROLLER SPECIFICATIONS

Carrying Roller	1.9" diameter 16-gauge steel rollers with 7/16" spring loaded axles
Between Frame Dimension	16", 20", 24", 30", 36"
Conveyor speed	60 fpm standard: variable speed optional
Roller Centres	3", 4-1/2" or 6" roller centres
Drive Capacity	15 to 22.5 lbs. Per roller
Length	20' to 70'
Drive Steering controls	8-way joystick or 4-way joy stick with for./rev. buttons
Paint	Standard Gray: Custom colours upon request

- 1 Control Panel
- 2 Floor Stop
- 3 14" Ø Drive Wheels
- 4 Drive
- 5 CAT Track
- 6 Photo-Eye
- 7 Steering Drive
- 8 Floor Stop
- 9 14" Ø Steering Wheels
- 10 Belt Drive
- 11 Head Lamp
- 12 Safety Stop Bar
- 13 Push Button Controller

